

A close-up of an Agilent 34970A Data Acquisition/Switch Unit. The device has a black display screen showing 'MUX' and 'T/E 30.5'. Below the screen are several buttons including 'Stop/Rel', 'Scan', 'Measure', 'Interval', and 'Configure'. The background is blurred, showing a person in a white lab coat.


Domestic Hot Water

Household Energy End-use Project (HEEP)

Nigel Isaacs, BRANZ Ltd.

- **Water heating fuels**
- **International comparison**
- **What drives hot water energy use?**
- **Standing losses**
- **Gas vs. electric hot water energy use**
- **Dangerously hot (electric) water**
- **Energy efficiency & fuel swap opportunities**

Hot water cylinders



Electric Storage
A Grade




Electric Storage
C Grade




Electric Storage
D Grade



Water Heating Fuels

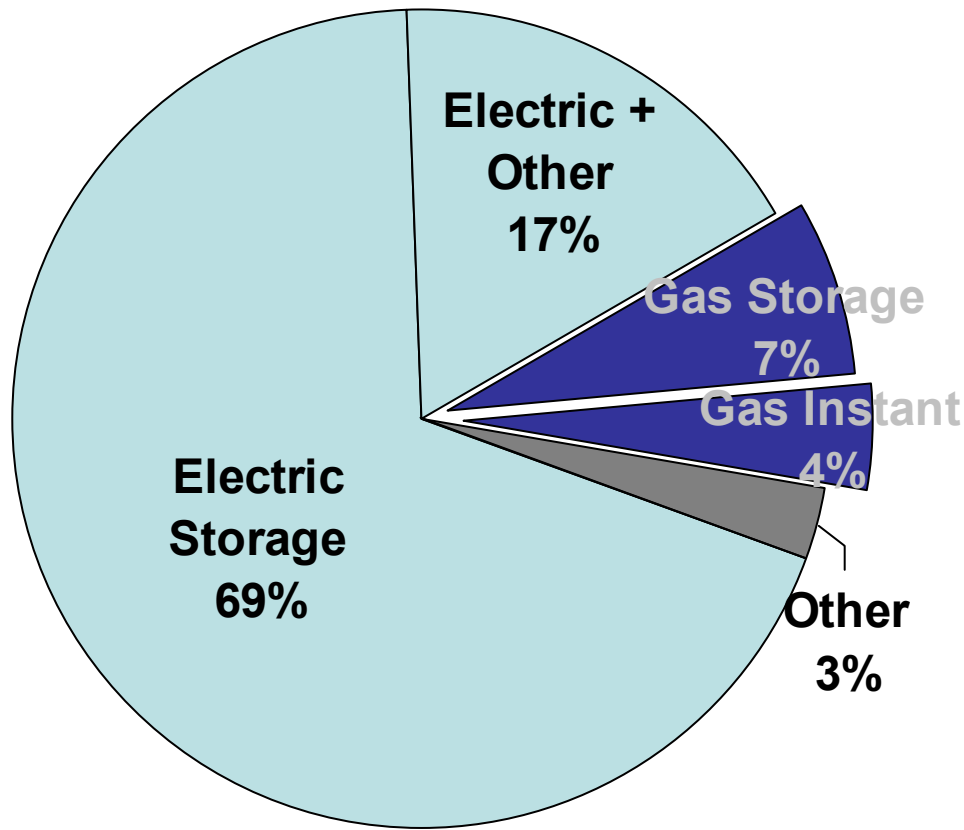


Household Count

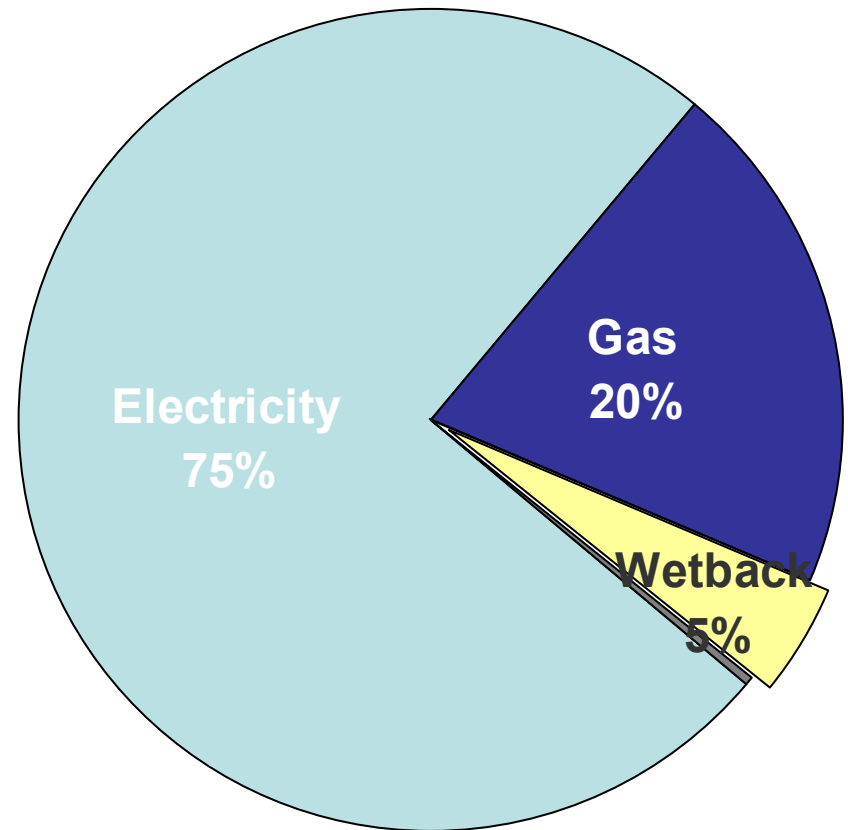

Energy Use

19 Country Comparison Use of Electric DHW

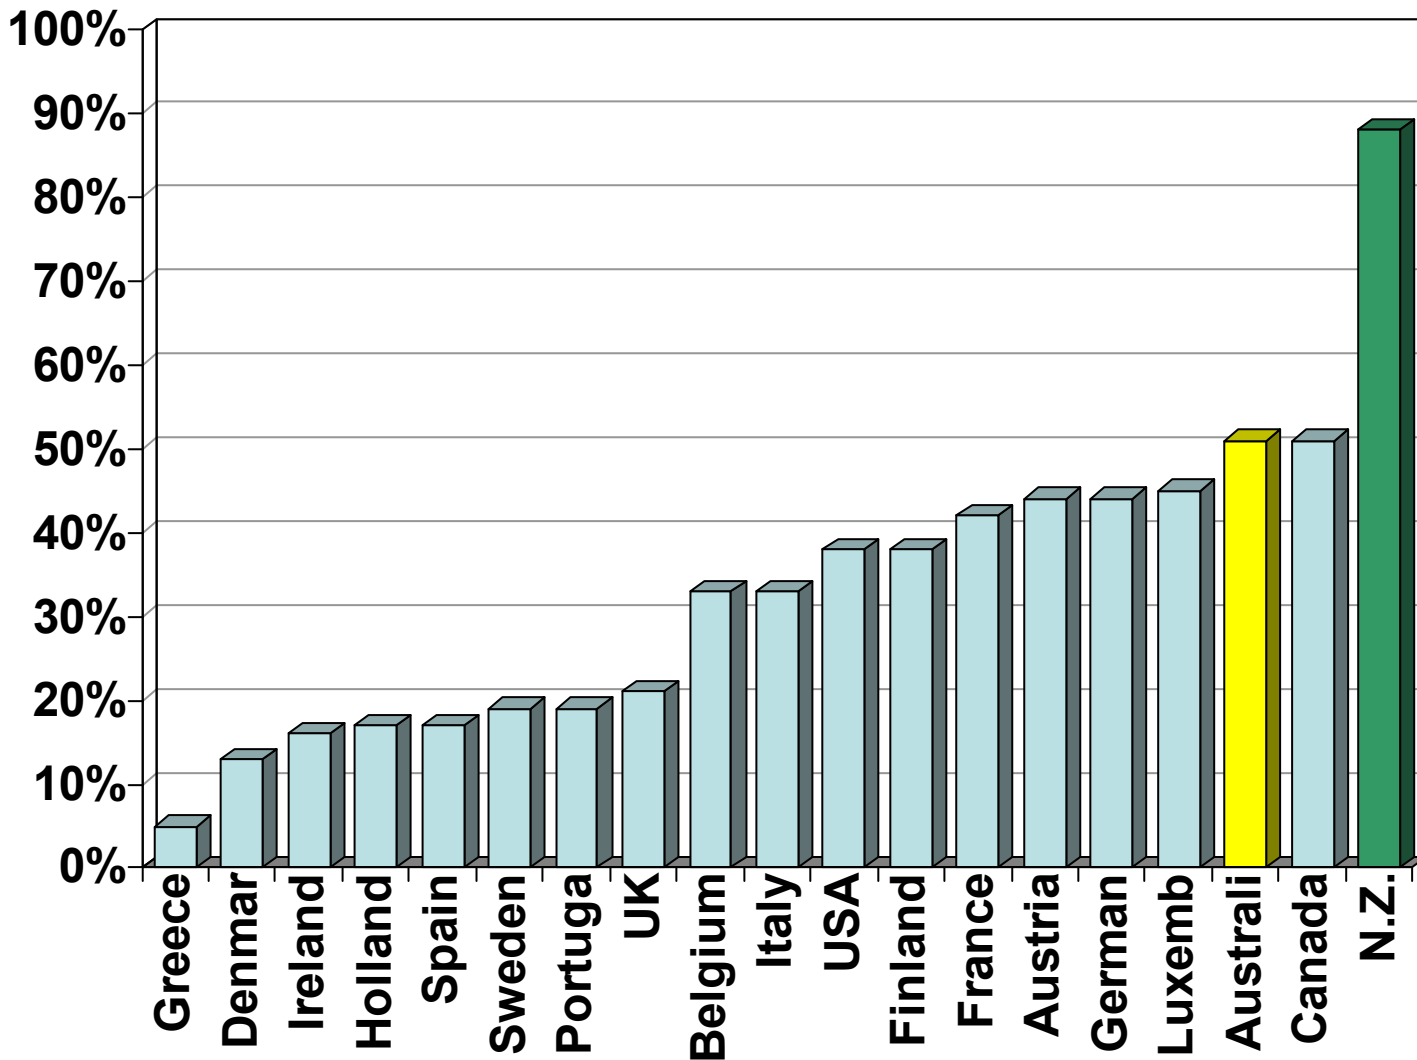

Energy use distribution

Fuel	Bottom 20%		Top 20%	
	< kWh/yr	% energy	> kWh/yr	% energy
Electricity	1,600	9%	3,750	37%
Gas	3,300	13%	7,300	27%
Wetback	180	3%	1,200	55%
All fuels	1,820	9%	4,300	37%

- **Bigger users use a lot more than small users**
 - Wetbacks show greatest skew
 - Top 20% house each use ~ 2 x as Bottom 20%
 - Water efficiency to reduce water & energy use

Impact of Occupancy

Occupancy (Person)	Average (kWh/yr)	% Households
1-3	2,590	56%
Over 3	4,370	43%
All	3,130	100%

- **3+ person households use 70% more hot water**
 - Larger households use more hot water:
 - ~90% 3+ households > 2,000 kWh/yr
 - ~60% of 1-3 households > 2,000 kWh/yr

Search for NZ oldest cylinder

(Thanks to Radio NZ National, 'Sounds Historical')

Date	Type	Location	In use
1920s	Wetback	Stewart Island	<input checked="" type="checkbox"/>
1930s	Electric dairy	Rahotu	<input checked="" type="checkbox"/>
1934	Wetback	Taranaki	<input checked="" type="checkbox"/>
1938	Electric storage	Christchurch	<input checked="" type="checkbox"/>
1930s	Gas califont	Otaki	


- **Copper, low pressure cylinders**
 - LONG life (depend on water quality)
- **Modern mains pressure, steel cylinders**
 - Likely to have shorter life

Changes over 35+ years

- **Bathing habits changing away from bath**
 - 1971/2: 74% Bath only, or bath \geq shower
 - HEEP: 6%
 - Change from 'batch' to 'flow'
- **Cylinder volume increasing**
 - 1971/2: 56% 135 litre, 35% 180 litre
 - HEEP: 40% 45%
 - In 1990s 180 litre became more popular

Analysis base – ONLY houses with electric water heating

Standing Losses

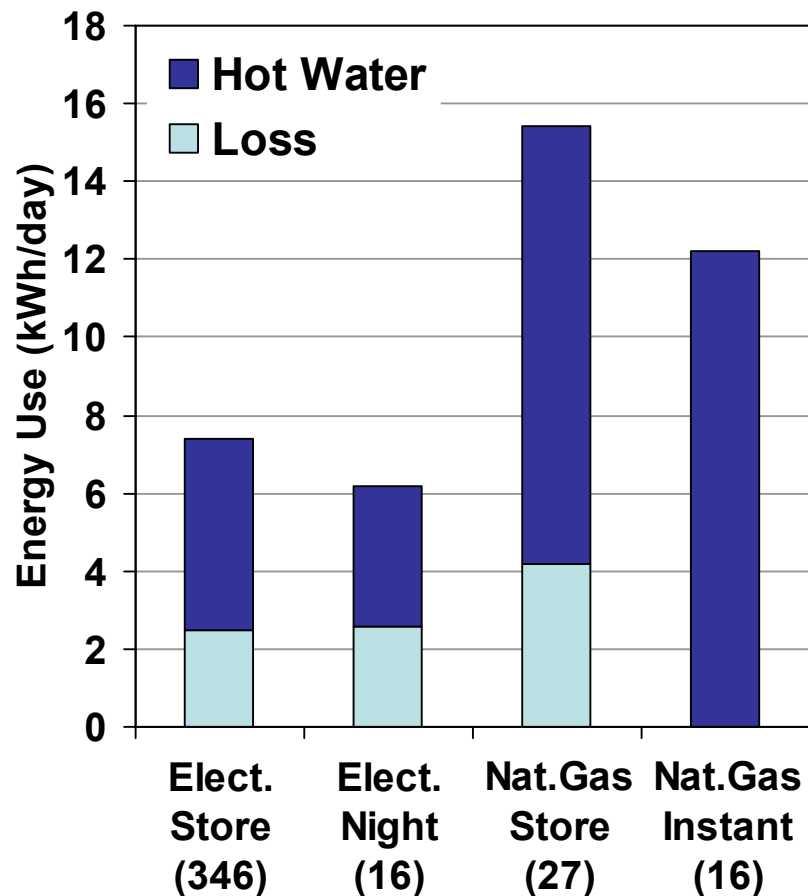

- Total = **Water** + **Standing Losses**
Social
Technical
- **Household Analysis**
 - Elect. Storage (346): 33% loss
 - Elect. night store (16): 42% loss
 - Nat. Gas Storage (27): 27% loss
 - Nat. Gas Instant (16): 0% loss
- **Does gas = more hot water?**
 - Graph is HEEP average
 - e.g. few & many occupants
 - Critical to **understand** data


Gas vs. non-Gas energy use?

- **Must compare on same basis**
 - Standing losses 4.2 gas vs. 2.5 elect kWh/day
 - Appliance efficiency 80% vs. 100%
- **Household differences (linear model, $r^2 = 42\%$)**
 - Number occupants + 24%
 - Floor area + 13%
 - Life stage -3% to + 9%
 - Shower water use +14%
 - **Use of gas** **+44%**
- **Linear model on same average house**
 - Non-gas use = 2,100 kWh/yr
 - Increase = 981 kWh/yr * **44%** = 414 kWh/yr
- **Gas = +20% hot water energy**

Other Differences Gas vs. Electric

- **Fuel type & service**
 - **78% low pressure water (mainly electric)**
 - 22% mains pressure water (mainly gas)
- **Measured shower flow rates:**
 - Low pressure 7 l/min (avg) 20 l/min (max)
 - Mains pressure 12.5 l/min (avg) 30 l/min (max)
- **Higher pressure = higher flow = more energy**
- **Reduce 18 l/min to 9 l/min for 5 min shower**
 - Save: 18 c/shower energy + 16.2 c/shower (water)
 - 34 c/ shower = \$124 per year per daily shower
 - Low-flow shower head ~ \$40

Water Temperature & Fuels

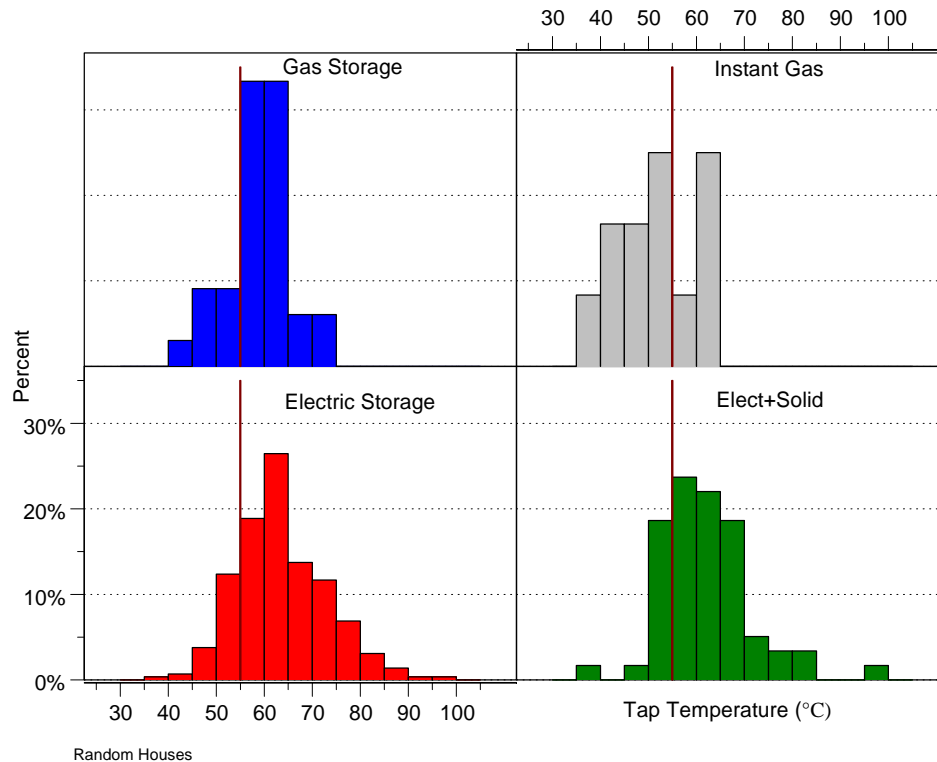


Delivered temp:	> 55°C	>60°C
Gas Storage	79%	45%
Gas Instant	33%	25%
Electric Storage	83%	64%
Elect. + solid	78%	54%

- Most storage DHW >55°C
- More elect. storage >60°C
- Current NZ Houses
 - 16% A Grade: temp. limited
 - Glass-on-steel: temp. limited

Reference line = 55°C




Water Temp. by Cylinder Volume

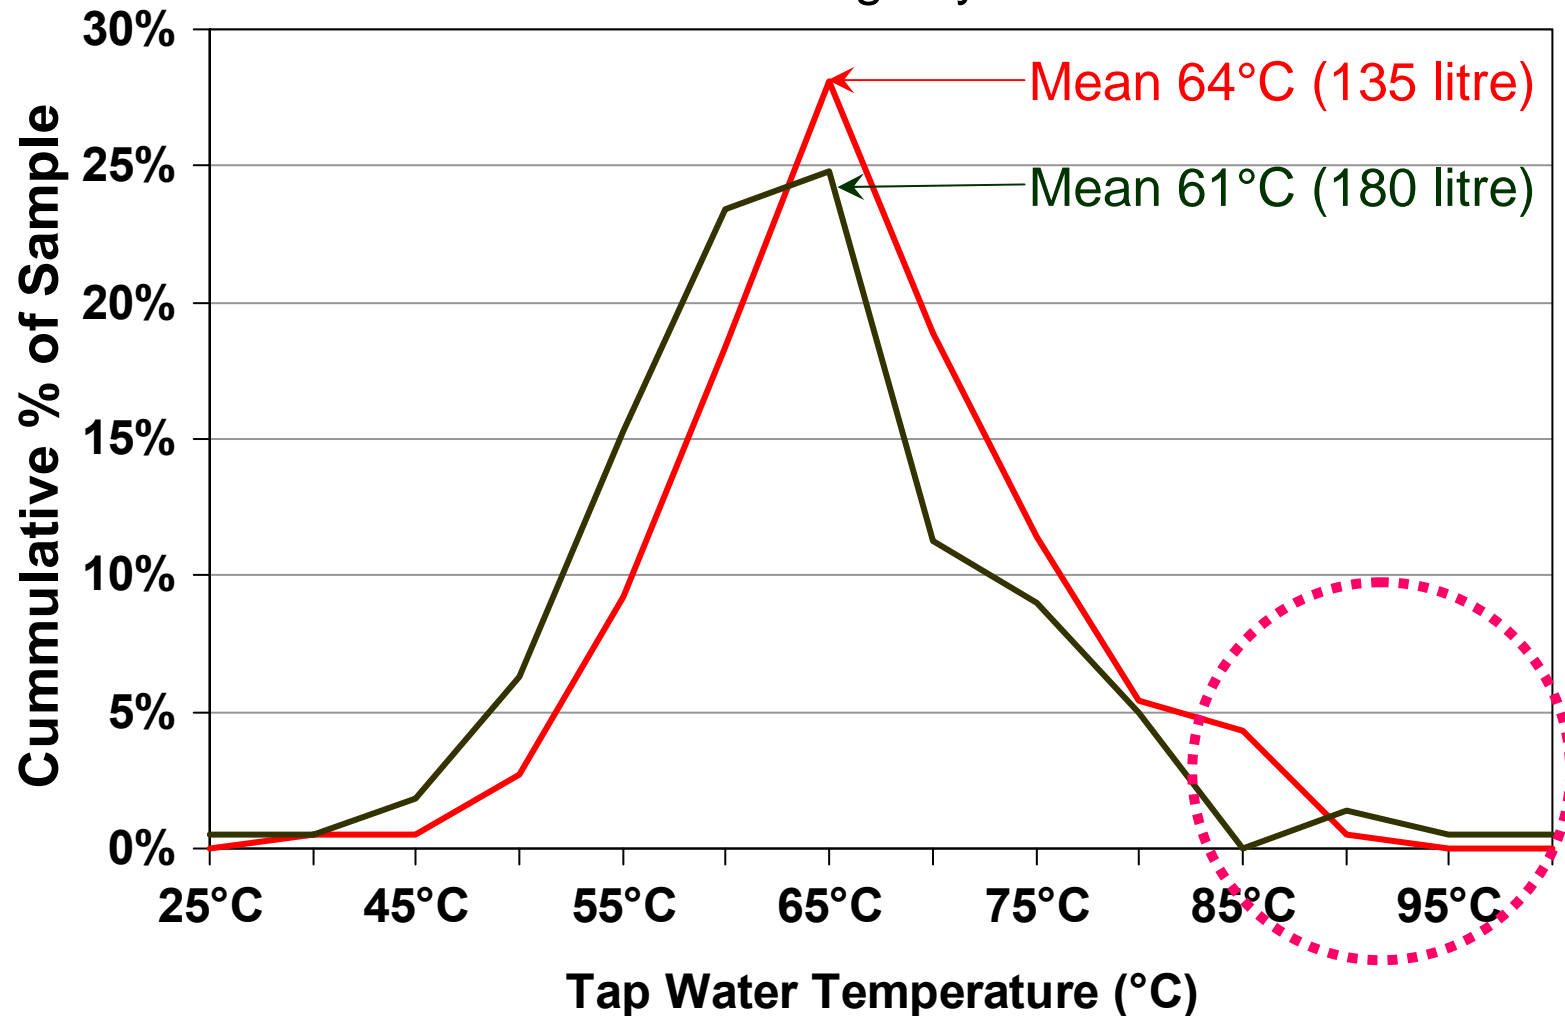Electric storage cylinders





Hot, Hot (Electric) Water

- **NZBC G12 Water Supply – 2 goals**
 - Legionella Store > 60 °C
 - Burns Deliver < 45°C
Early Childhood, Old Age Homes & School
Deliver < 55°C
All other buildings
- **81% houses deliver water > 55°C = TOO HOT**
 - Median tap temperature = 62°C (**1% OVER 80°C**)    
- **‘Tempering valve’ solution**
 - Mix cold & hot water to fixed (safe) temperature
 - Only required in ‘new’ installations
- **But why do households need such ‘hot’ water ?**
 - Electric storage cylinders: Demand **EXCEEDS** Supply
 - Trade-offs: **Temperature vs. Volume vs. Element kW**

Electric Cylinders & Losses

Volume (litres)	Insulation Grade	Actual Loss (kWh/day)	HEEP Sample #
135	A or B	2.1	51
	C or D	2.8	56
	Wrapped	1.8	9
180	A or B	2.2	76
	C or D	2.7	28
	Wrapped	2.1	10

How can these losses be reduced ?

Note: losses not normalised to match NZS4602 values

Reducing Electric Cylinder Losses



- **Improve efficiency**
 - Install a new cylinder; heat pump; solar
 - Retrofit 'insulating blanket' (wool, fibreglass)
 - Insulate pipework (NZS4305 minimum 2 metre)
 - Fuel switch: direct burn gas

Energy Efficiency Opportunities

Measure –replace old D grade 180 litre electric cylinder	Installed Cost (\$)	Electric Savings (\$/yr)	Simple Payback (yr)
Electric			
Self installed wrap & pipe insulation	\$90	\$40	2
Cylinder wrap & pipe insulation	\$150	\$40	3
New A grade (180 l mains)	\$1,400	\$40	38
Heat pump DHW (310 l)	\$6,250	\$420	15
Solar (inc. new electric cylinder)	\$7,000	\$320	22
Gas (use 20% more hot water)			
New gas cylinder (152 litre)	\$2,200	\$240	9
New Gas instant (24 litre)	\$2,400	\$400	6
Gas condensing continuous (24 litre)	\$3,000	\$460	7

Assumptions: Electricity 20 c/kWh; Gas 11 c/kWh; Solar = 50% of hot water

Installation: Gas \$1,000; Electric \$500-\$1000; Solar \$3,000

Efficiency: Heat pump 300%; Gas 80%; Condensing gas 95%

Summary - DHW

- **Average 29% of household energy (range 4% - 74%)**
- **Fuel mix highly skewed**
 - Electric (75% energy), Gas (20%), Wetbacks (5%)
 - NZ has **highest % electric DHW of any country**
 - DANGEROUS rod-type electric thermostats
- **Social changes**
 - Major shift in bathing to showers
- **Energy Efficiency**
 - Mains pressure = high flow **NEED** low flow showers
 - Cylinder wrap: cost effective 2 to 3 yr
- **Potential benefits from direct use of gas**
 - Gas +20% energy use over electric DHW system
 - Possibly unsatisfied demand for hot water
 - Fastest consumer payback